


## Fibers & Aftertreatment

Basic Material	Cont.	LOI in %	Acid	Alcaiy	H20 Hydrolysis	Oxydation	Solvents
PA6.6 (Polyamid 6.6)	110 – 115	28	88	0	00	0	0
PAN (Polyacrylnitrile)	125 – 140	18	0	•	0	0	0
PET (Polyester)	150 – 180	20	•	0	0	0	•
PPS (Polyphenylensulfid)	190 – 200	41	00	00	00	•	00
oxidized PAN	200 – 220	45	0	0	0	00	0
meta Aramid	200 – 220	30	88	0	00	0	00
PI (Polyimide)	200 – 240	38	0	0	•	0	0
para Aramid	200 – 450	28	88	88	140	14.	0



Thanks to our self-sufficient finishing line, we are able to provide technical nonwovens, textiles and fabrics with the following properties:

impregnation, surface modification, foam application, lamination



## Antistatic filter media

Our technology allows us to directly implement antistatic fibers into the filter media to provide homogeneous and everlasting high conductivity.

- **⊘** prevention of dust caused explosions (flour, wooden dust, milk powder etc.)
- **⊘** avoidance of voltage discharge



Depending on the requirements we can combine various fibers, layers and structures for an optimal, durable media. Through binder impregnation or scrim inclusion these can be evolved into a self-supported pleated filter media.


**ઇ** temp. above 150 up to 260°C









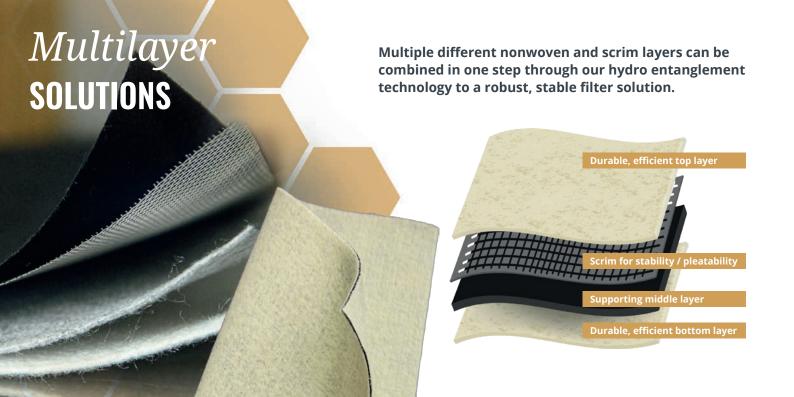



Responsible use of resources and energy is one of the cornerstones of our corporate philosophy.

## CRYSTALEN REPRESENTS

high quality filter media

**⊘** stability

**⊘** purity

igotimes durability



